



FAZ ADOM Configuration Lab:

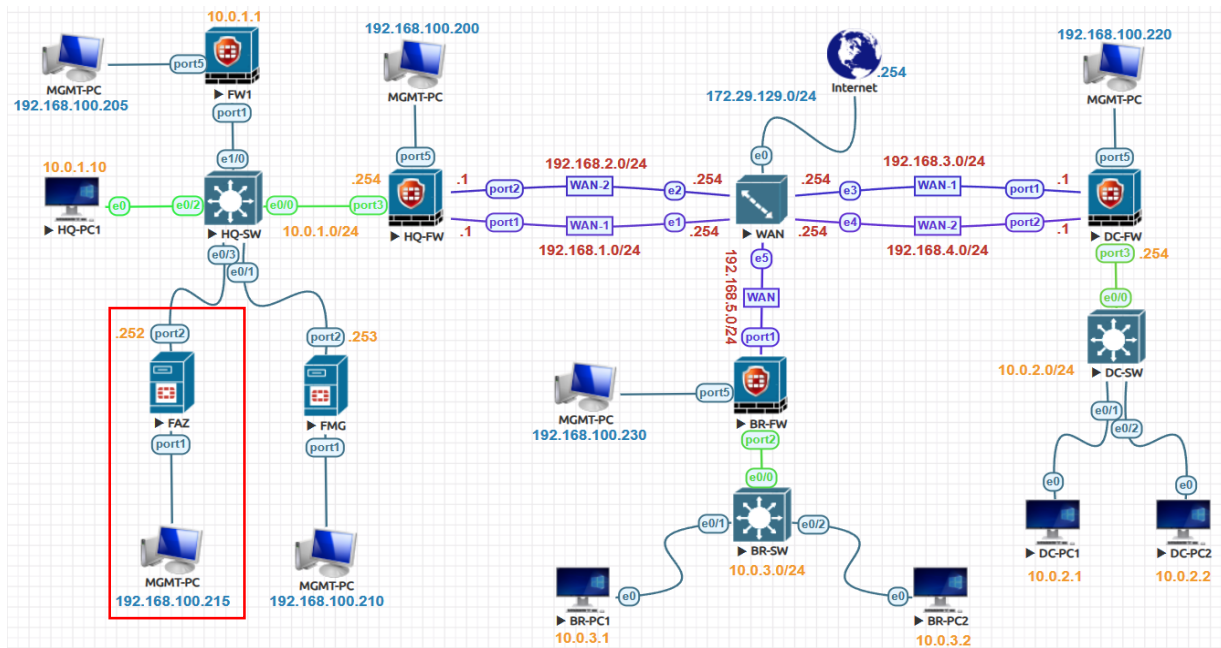


| | |
|-----------------------|-------------------------------|
| Internal Port | Port2 |
| Management Port | Port1 |
| Management IP Address | 192.168.114.215 |
| Internal IP Address | 10.0.1.252 |
| Gateway | 10.0.1.254 |
| FortiManager Hostname | FAZ |
| FortiManager Version | FAZ_VM64_KVM-v7.2.1-build1215 |
| MGMT-PC | Management Cloud0 |
| ADOM Mode | Normal ADOM |
| ADOM Name | FG-7-0-9 |
| Administrator | Admin |

Enable ADOM:

To enable ADOMs, Go to **System Settings>Dashboard**. In the **System Information** widget, go to Administrative Domain, and **toggle On**.

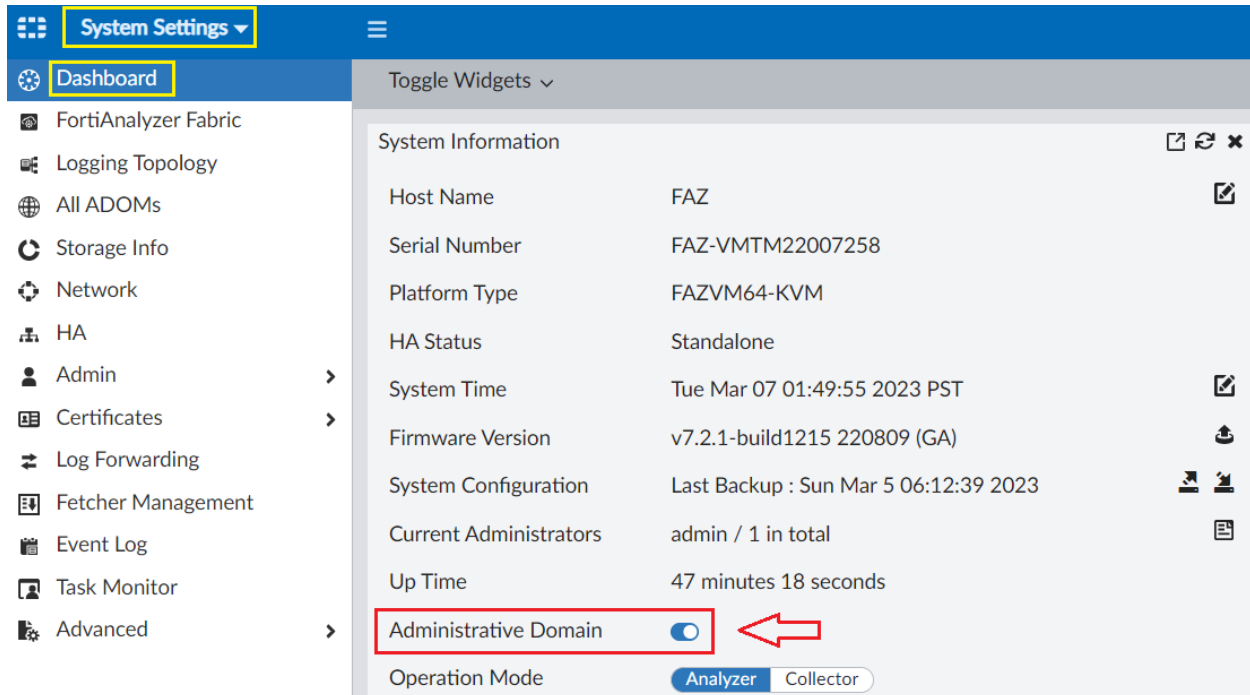


It will log you out login back.

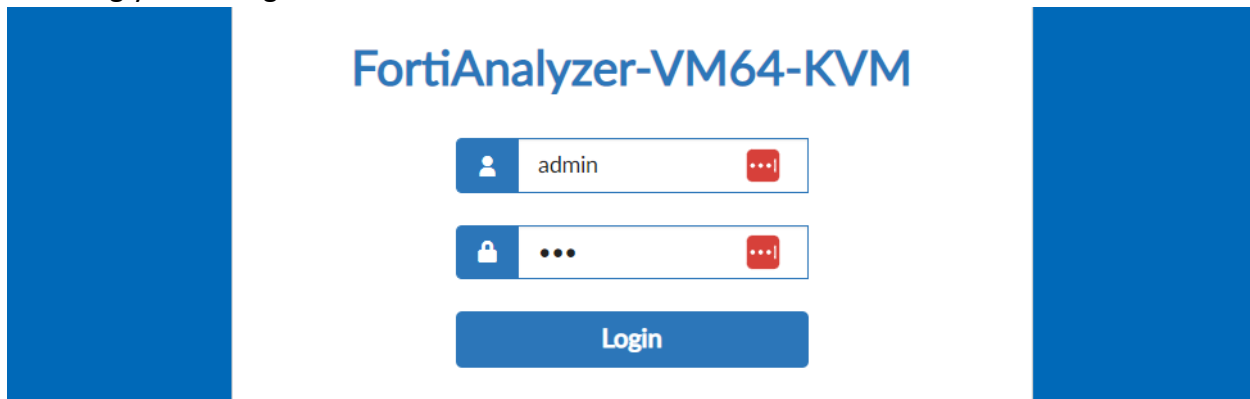


Create Normal ADOMs:

Go to **System Settings > All ADOMs**. Click **Create New** in the toolbar. The Create New ADOM pane is displayed.

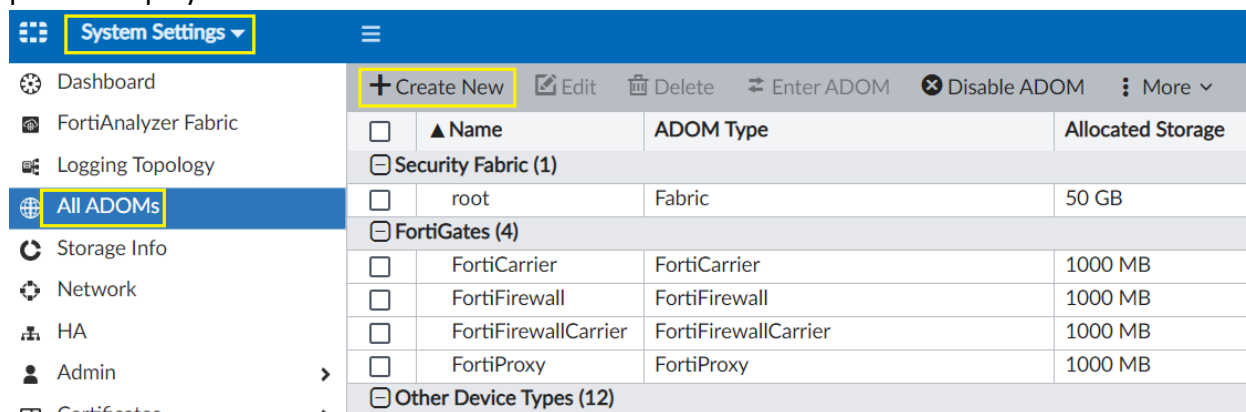

| <input type="checkbox"/> | Name | ADOM Type | Allocated Storage |
|--------------------------|----------------------|----------------------|-------------------|
| Security Fabric (1) | | | |
| <input type="checkbox"/> | root | Fabric | 50 GB |
| FortiGates (4) | | | |
| <input type="checkbox"/> | FortiCarrier | FortiCarrier | 1000 MB |
| <input type="checkbox"/> | FortiFirewall | FortiFirewall | 1000 MB |
| <input type="checkbox"/> | FortiFirewallCarrier | FortiFirewallCarrier | 1000 MB |
| <input type="checkbox"/> | FortiProxy | FortiProxy | 1000 MB |
| Other Device Types (12) | | | |

Configure the following settings, then click **OK** to create the ADOM. Type a name that allows you to distinguish this ADOM from your other ADOMs. Select the type FortiGate.

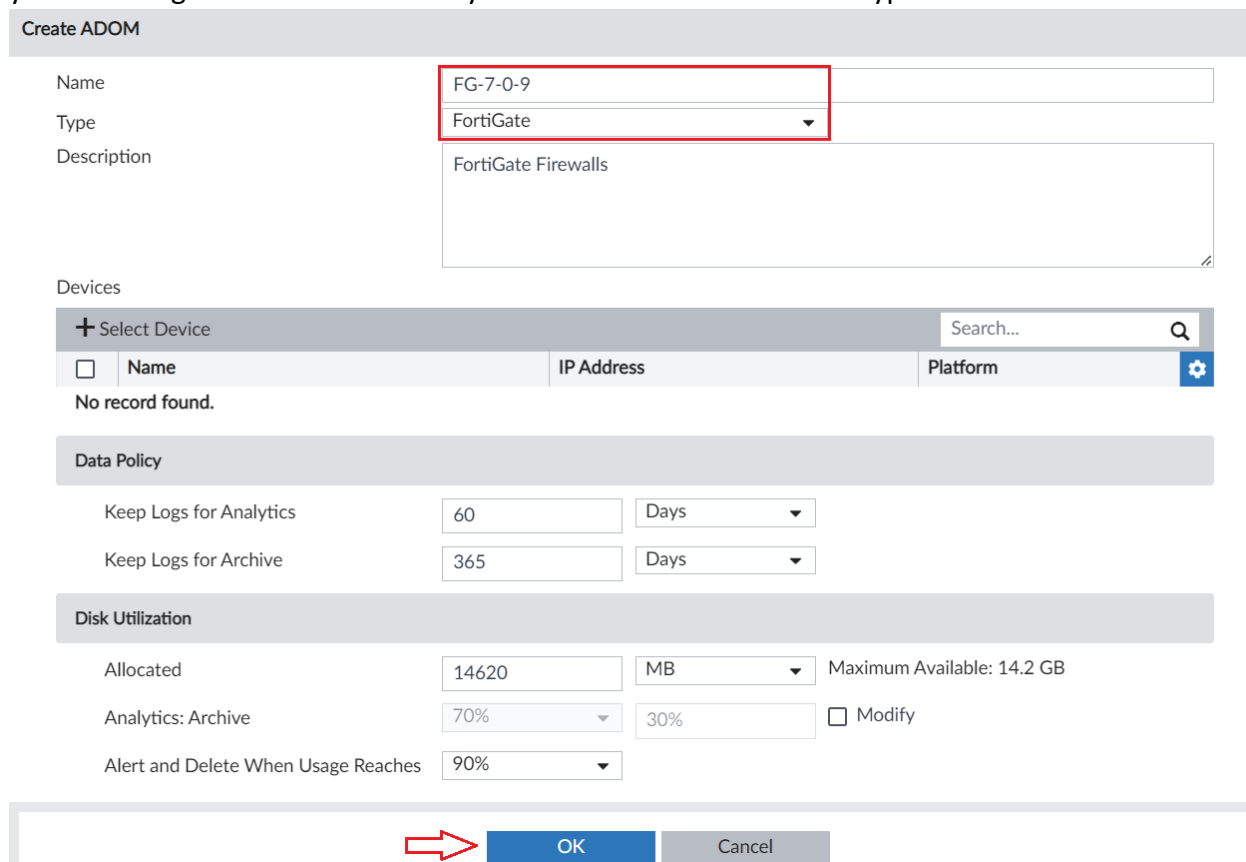

Create ADOM

Name: FG-7-0-9
Type: FortiGate
Description: FortiGate Firewalls

Devices

+ Select Device

| <input type="checkbox"/> | Name | IP Address | Platform |
|--------------------------|------|------------|----------|
| No record found. | | | |

Data Policy


Keep Logs for Analytics: 60 Days
Keep Logs for Archive: 365 Days

Disk Utilization


Allocated: 14620 MB
Analytics: Archive: 70%
Alert and Delete When Usage Reaches: 90%

OK Cancel

From top right corner change the root ADOM to recently created **ADOM FG-7-0-9**



Go to **System Settings > All ADOMs**. Double-click on an ADOM, right-click on an ADOM and then select the **Edit** from the menu, or select the ADOM then click **Edit** in the toolbar. The Edit ADOM pane opens. Click **Select Device**. The Select Device list opens on the right side of the screen. Select the devices that you want to add to the ADOM. The selected devices are displayed in the Devices list. When done selecting devices, click **Close** to close the Select Device list. Click **OK**. The selected devices are removed from their previous ADOM and added to this one.

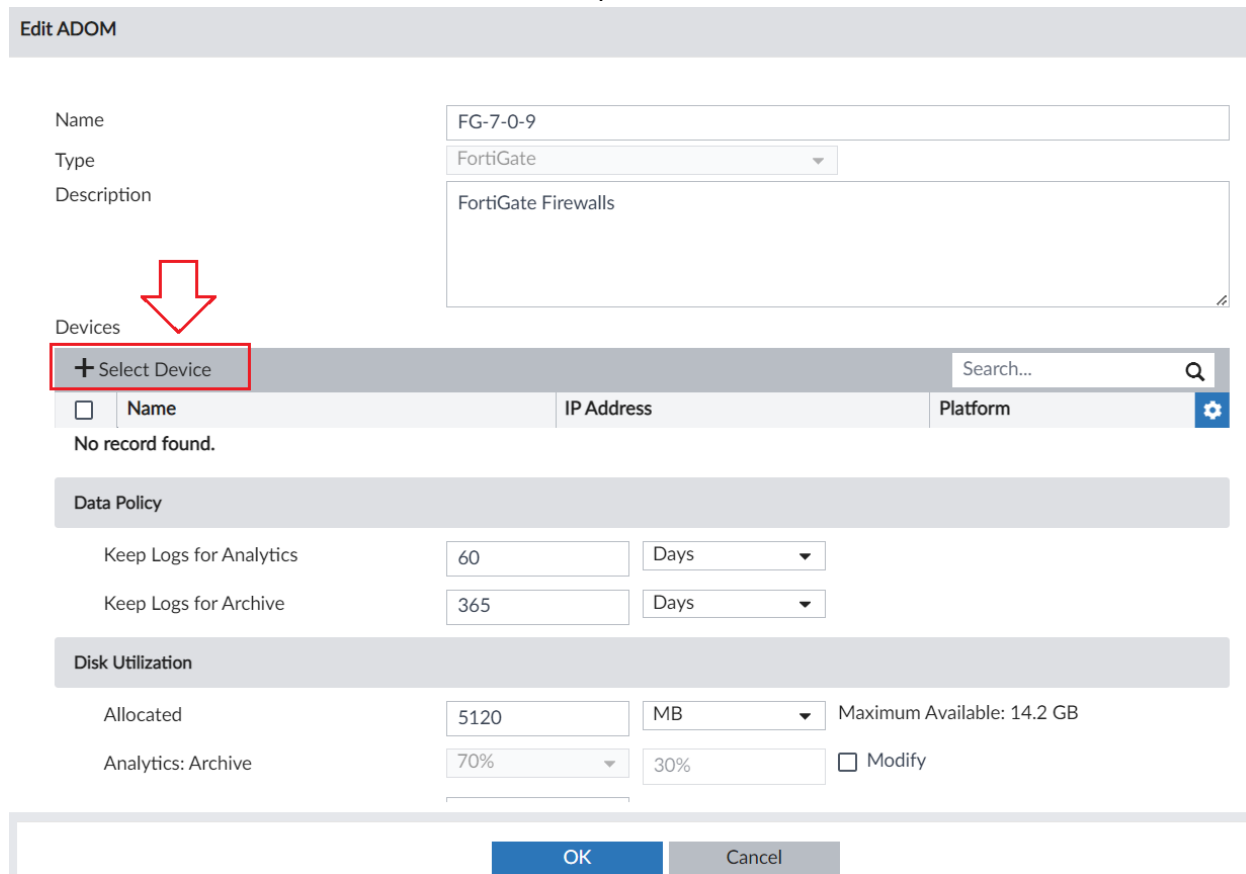

From top right corner change the root ADOM to recently created **ADOM FG-7-0-9**


Select an ADOM

root (1)
Fabric

FG-7-0-9
FortiGate

FG-7-0-9 (0)
FortiGate Firewalls

Navigate to **Device Manager > Device & Groups**, and click **Add Device**.

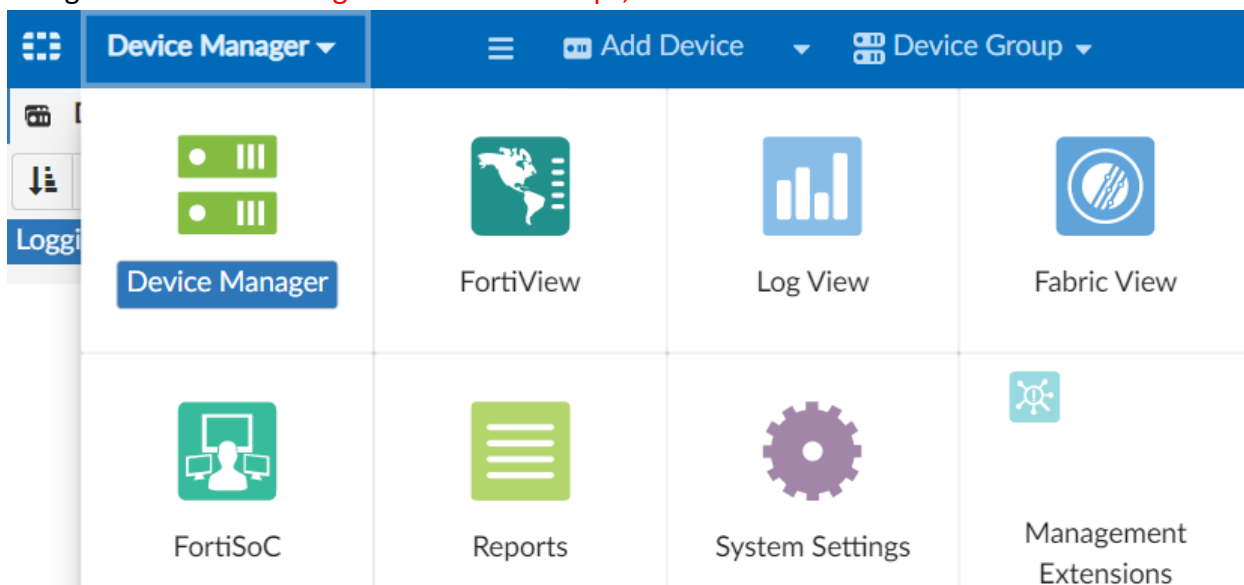

Follow **Add Device** wizard, to add a new device to recently created normal ADOM **FG-7-0-9**

Device Manager

Add Device

Device & Groups

Search...

Logging FortiGate

Add Device

Please input the following information to add a device.

Name

Link Device By

☒ Serial Number ☐ Pre-shared Key

Serial Number

Device Model

Description

Next > Cancel