




## Configure FortiAnalyzer Logging:

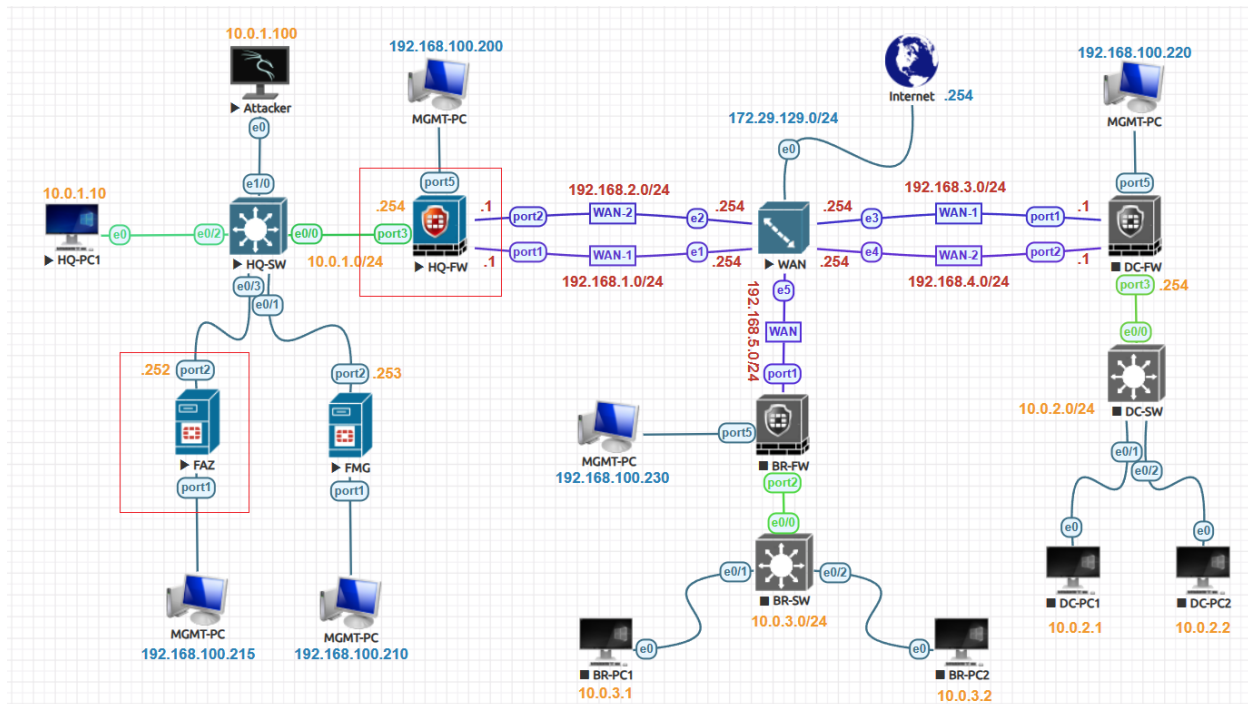

Go to **Security Fabric > Fabric Connectors** and double-click the **FortiAnalyzer Logging** card.

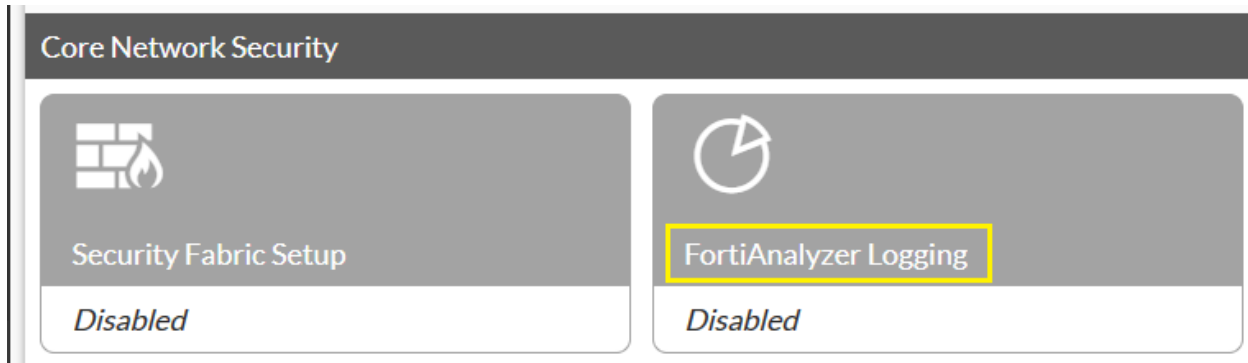

Set the Status to **Enabled**. Enter the FortiAnalyzer IP in the Server field (**192.168.100.215**). Set the Upload option to Real Time. Click **OK**.

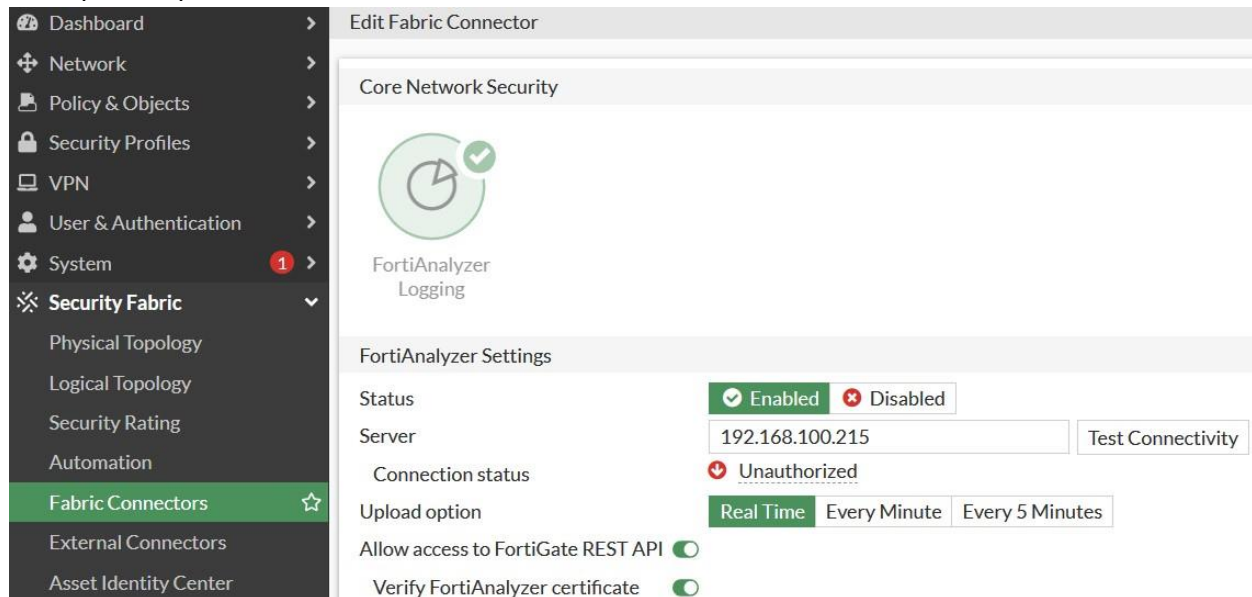

Dashboard > Edit Fabric Connector

Core Network Security

FortiAnalyzer Logging

FortiAnalyzer Settings

Status: ☒ Enabled ☐ Disabled

Server: 192.168.100.215 Test Connectivity


Connection status: ☒ Unauthorized

Upload option: ☒ Real Time ☐ Every Minute ☐ Every 5 Minutes

Allow access to FortiGate REST API: ☒

Verify FortiAnalyzer certificate: ☒

A warning message indicates that the FortiGate is not authorized on the FortiAnalyzer. The authorization is configured in a later step on the FortiAnalyzer. Click **Accept**. The FortiAnalyzer serial number is verified.

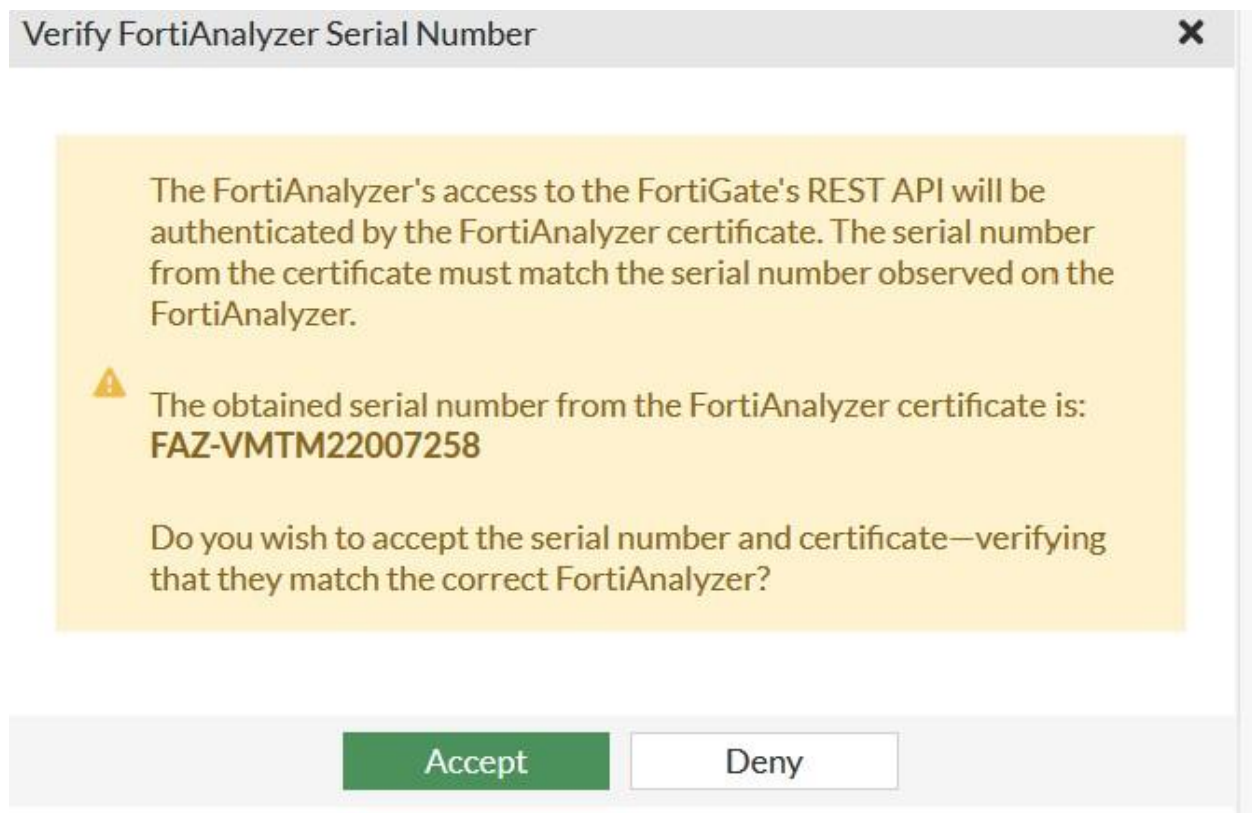

Verify FortiAnalyzer Serial Number

The FortiAnalyzer's access to the FortiGate's REST API will be authenticated by the FortiAnalyzer certificate. The serial number from the certificate must match the serial number observed on the FortiAnalyzer.


**The obtained serial number from the FortiAnalyzer certificate is: FAZ-VMTM22007258**


Do you wish to accept the serial number and certificate—verifying that they match the correct FortiAnalyzer?

Accept Deny

It will ask to Authorize click **Close**.

FortiAnalyzer Status


 This FortiGate is not authorized on FortiAnalyzer. Click the "Authorize" button below to review the approval status on FortiAnalyzer.

 Authorize


Close

## FortiAnalyzer Authorization:

Login to FortiAnalyzer in the root ADOM, go to **Device Manager** and click **Unregistered Devices** in the quick status bar. The content pane displays the unregistered devices.

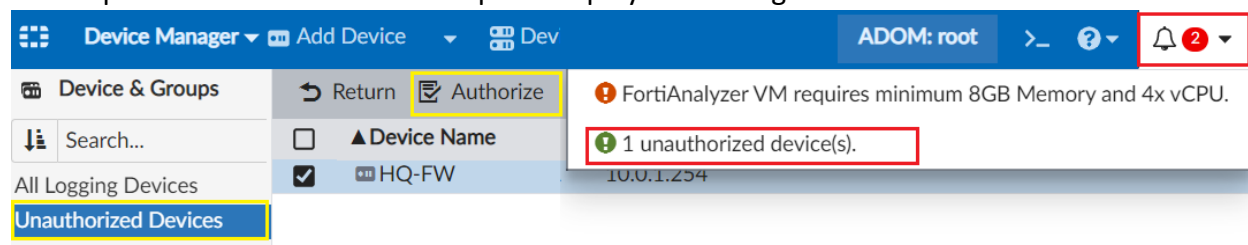

Select the unregistered device or devices, then click **Authorize**.

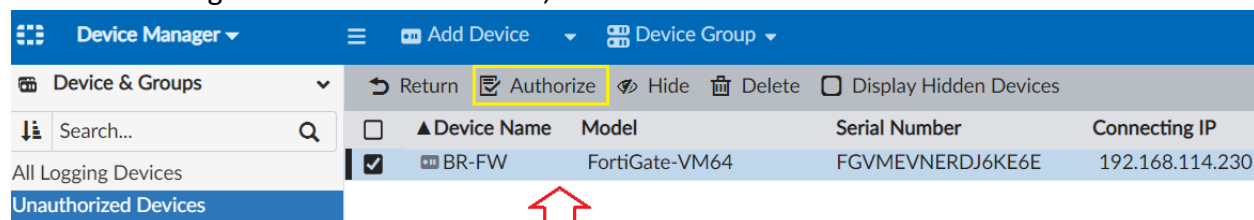

Select the ADOM in the **Add the following device(s) to ADOM** list. Click **OK** to register the device or devices. The device or devices are added and FortiAnalyzer can start receiving logs from the device or devices.

## Authorize Device

Add the following device(s) to ADOM: FG-7-0-9 (FortiGate 7.2)

| Device Name | Assign New Device Name |
|-------------|------------------------|
| HQ-FW       | HQ-FW                  |

OK Cancel

The device is successfully authorized click **Closed**.

## Authorize Device

Device Authorization 100% [View Details](#)

Admin User

Password